


## 2LST SERIES

### Two Lamp Staggered Strip

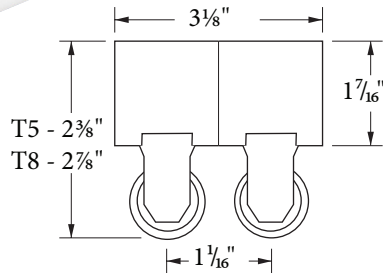

## DESIGN


The 2LST Series Two Lamp Staggered Strip is designed to maintain a uniform distribution of light and eliminate dark spots between lamps. It was made specifically for coves or display cases where lighting is installed as a continuous run from end to end.

## ACCESSORIES

Order as separate line item



**6' 16/3 CORD W/ 15A NEMA PLUG**  
C1 (120V)  
C2 (277V)  
C4 (480V)



**ASSYMETRICAL REFLECTOR**  
AR2 (2')  
AR3 (3')  
AR4 (4')



**T8 EMERGENCY BALLAST**  
EB5 (500 LUMEN)  
EB7 (700 LUMEN)  
EB14 (1400 LUMEN)  
EB30 (3000 LUMEN)




**WIRING HARNESS**  
WH34 (3 WIRE, 4')  
WH44 (4 WIRE, 4')  
WH54 (5 WIRE, 4')

## PHOTOMETRICS

IES INDOOR REPORT  
PHOTOMETRIC FILENAME : 2LST232.IES

POLAR GRAPH



Maximum Candela = 1170 Located At Horizontal Angle = 90, Vertical Angle = 15  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (15) (Through Max. Cd.)

## ORDERING INFORMATION

Description	Part Number
2L 14W T5 120/277V	2LST21424D (A)
2L 17W T8 120/277V	2LST21724D (A)
2L 21W T5 120/277V	2LST22136D (A)
2L 24W T5HO 120/277V	2LST22424D (A)
2L 25W T8 120/277V	2LST22536D (A)
2L 28W T5 120/277V	2LST228T524D (A)
2L 32W T8 120/277V	2LST23248D (A)
2L 39W T5HO 120/277V	2LST23936D (A)
2L 54W T5HO 120/277V	2LST25448D (A)

### Option Codes

#### (A) Options

Blank - None  
10RS - ≤10% THD, Rapid Start  
P - Program Start  
20 - ≤20% THD

## MOUNTING

2 Sets of each mount must be ordered per fixture



**(3)S HOOKS AND 36" CHAIN SET**  
10JC



**AIRCRAFT CABLE WITH 12" ARMS**  
G10 (10')  
G12 (12')  
G15 (15')

## TECHNICAL INFORMATION

Fixture housing, lamp holder brackets, end sections, and channel cover are constructed of heavy gauge die-formed steel. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Can be mounted as single fixture or in a continuous row. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.