



Catalog Number	
Project	Type

Features & Specifications

Features

- Energy-efficient LED technology
- Spec-grade curved faceplate
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Long-life, maintenance-free, rechargeable Ni-Cad battery (B Model)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Mounting

- Die-cast mounting canopy included (provides top, end or back mount convenience)
- Universal wall mounting K/O pattern

Housing

- Premium-grade, extruded aluminum housing (also available in black or white powder coated)
- Easily removable chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure

Illumination

- Ultra-bright, energy efficient, long-life Red or Green LED


Warranty

- Five Year Warranty on all electronics and housing. Batteries are provided warranted for 5 years.

DLE SERIES DIE-CAST ALUMINUM LED EXIT SIGN



DIMENSIONS

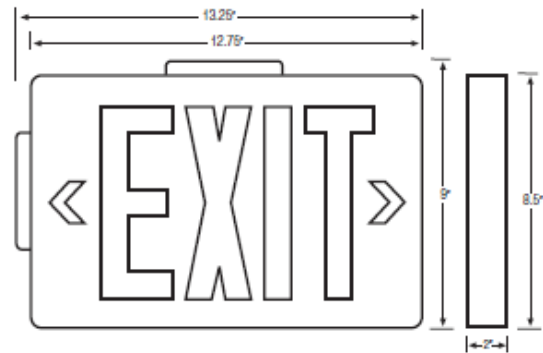

Please contact your Horizon Sales Representative for more information.

Ordering Nomenclature

Ex: (Die-Cast Aluminum LED Exit Sign, Red Letters, Double Face, Brushed Aluminum Panel, Black Housing, AC Only = DLER2AB)

DLE						
------------	--	--	--	--	--	--

SERIES DLE	LETTER COLOR R - Red G - Green	NUMBER OF FACES 1 - Single Face 2 - Double Face	PANEL COLOR W - White B - Black A - Brushed Aluminum	HOUSING COLOR W - White B - Black A - Brushed Aluminum	BATTERY Blank - AC Only B - NiCad Battery	ACCESSORIES SD - Self Diagnostic 2C - Dual Circuit (Only one hot circuit at a time)