
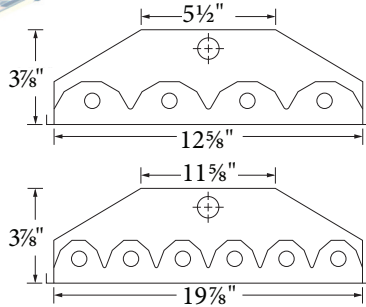


EHB SERIES

Enclosed High Bay

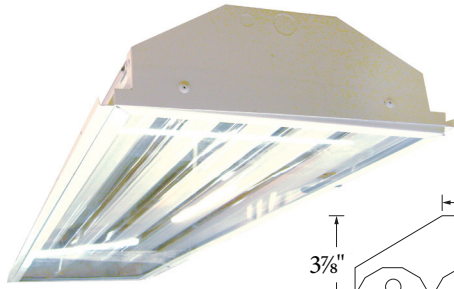

DESIGN

The EHB Enclosed High Bay is designed for industrial, institutional, and commercial applications as a direct replacement for HID fixtures (Up to 50% savings compared to a 400W MH fixture). Perfect for warehouse, retail, or manufacturing applications where the lamps cannot be exposed to the open environment.

ACCESSORIES

Order as separate line item

6' 16/3 CORD W/ 15A NEMA PLUG
 C1 (120V)
 C2 (277V)
 C4 (480V)


T8 EMERGENCY BALLAST
 EB5 (500 LUMEN)
 EB7 (700 LUMEN)
 EB14 (1400 LUMEN)
 EB30 (3000 LUMEN)

MOTION SENSOR
 WOC (120/277V)
 WOC1 (347/480V)

WIRE GUARD
 EHBWG4 (4 LAMP)
 EHBWG6 (6 LAMP)


PHOTOMETRICS

IES INDOOR REPORT
 PHOTOMETRIC FILENAME : EHB432.IES
 POLAR GRAPH



Maximum Candela = 6191 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5
 # 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

IES INDOOR REPORT
 PHOTOMETRIC FILENAME : EHB654.IES
 POLAR GRAPH



Maximum Candela = 9247 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5
 # 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

ORDERING INFORMATION

Description	Part Number
4L 32W T8 120/277V NO LENS	EHB432NLD(A) ¹
6L 32W T8 120/277V NO LENS	EHB632NLD(A) ¹
4L 54W T5 120/277V NO LENS	EHB454NLD(A) ¹
6L 54W T5 120/277V NO LENS	EHB654NLD(A) ¹
4L 32W T8 120/277V POLYCARB	EHB432FD(A) ²
6L 32W T8 120/277V POLYCARB	EHB632FD(A) ²
4L 54W T5 120/277V POLYCARB	EHB454FD(A) ²
6L 54W T5 120/277V POLYCARB	EHB654FD(A) ²

Option Codes

(A) Options

- Blank - None
- 10RS - ≤10% THD, Rapid Start
- P - Program Start
- 20 - ≤20% THD
- IO - Inboard/Outboard (2 Lamp-2 Lamp)
- IO2 - Inboard/Outboard (1 Lamp-3 Lamp)
- IO3 - Inboard/Outboard (3 Lamp-3 Lamp)

MOUNTING

2 Sets of each mount must be ordered per fixture



(3)S HOOKS AND
 CHAIN SET
 10JC



TONG HANGER
 THE (END MOUNT)
 THS (SIDE MOUNT)



AIRCRAFT CABLE WITH
 12" ARMS
 G10 (10')
 G12 (12')
 G15 (15')

TECHNICAL INFORMATION

Housing is constructed of structurally embossed, heavy gauge, cold rolled steel. Available as open optics or lensed with a reinforced aluminum door. Ballasts are accessible by removal of socket-plate screws. Miro 4 reflector standard. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

Notes: 1-All part numbers shown with NL designation come standard with no lens. 2-All part numbers shown with F designation come standard with a .125" Clear Polycarbonate Lens.