



Catalog Number	
Project	Type

## Features & Specifications

### Features

- Heavy duty construction
- Remote capable
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 10Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

### Mounting

- Side and top conduit knockouts

### Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic construction

### Illumination

- Adjustable, glare-free PAR-Type lamp heads
- 6V model offers 7.2W lamps, standard
- 12V model offers 9W/12W lamps, standard


### Warranty

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

## HD SERIES HEAVY DUTY EMERGENCY LIGHT



### DIMENSIONS

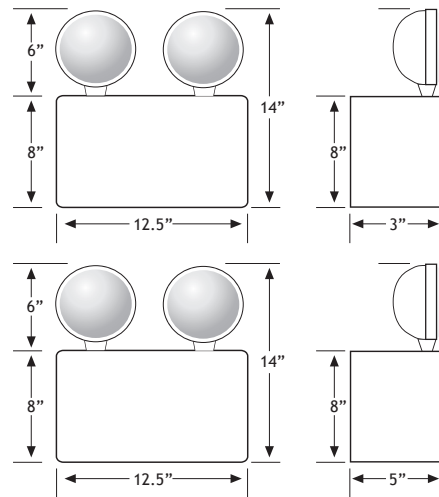

Please contact your Horizon Sales Representative for more information.

### Ordering Nomenclature

Ex: (Heavy Duty Emergency Light, 12V, 100W = HD12V10)

	<b>HD</b>			
	SERIES HD	VOLTAGE 6V - 6 Volt 12V- 12 Volt	WATTS (FOR 90 MINUTES) 5 - 50 Watt 10 - 100 Watt	ACCESSORIES SD - Self Diagnostic HT- Internal Heater (50W Only) SB12- 12V 12W Sealed Beam Halogen SB20- 12V 20W Sealed Beam Halogen