



Catalog Number	
Project	Type

Features & Specifications

Features

- Compact, low-profile design in neutral finish
- Energy-efficient LED technology
- EZ snap-out chevron direction indicators
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Long-life, maintenance-free, rechargeable NiCd battery (B Model)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Mounting

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy. Includes flat back for single face mounting or two exit signs for double face mounting.

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish

Illumination

- Ultra-bright, energy efficient, long-life Red or Green LED
- Offers 11W of remote capability


Warranty

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

LE SERIES LED EXIT SIGN



DIMENSIONS

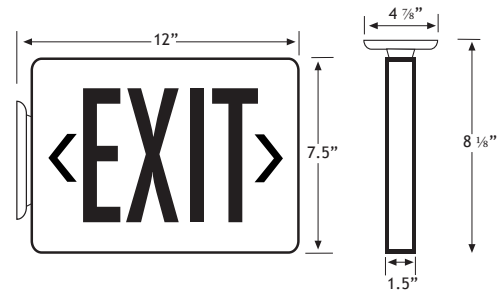

Please contact your Horizon Sales Representative for more information.

Ordering Nomenclature

Ex: (Standard LED Exit Sign, Red Letters, Double Face, White Housing, AC Only = LER2W)

LE					
----	--	--	--	--	--

SERIES	LETTER COLOR	NUMBER OF FACES	HOUSING COLOR	BATTERY	ACCESSORIES
LE	R - Red G - Green	2 - Double Face	W - White B - Black	Blank - AC Only B - Battery Back-Up	SD - Self Diagnostic 2C - Dual Circuit (Only one hot circuit at a time)