
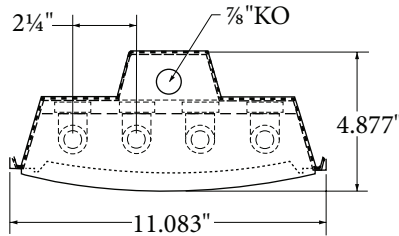


LHB SERIES

Louvered High Bay

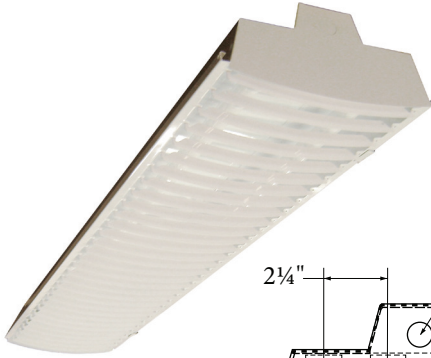

DESIGN

The LHB Louvered High Bay is designed for cost effective lighting of "big box" retail, shopping malls, light industrial, school gymnasiums and any other application that requires efficient light output with reduced glare and a contemporary industrial look.

ACCESSORIES

Order as separate line item

6' 16/3 CORD W/ 15A NEMA PLUG
C1 (120V)
C2 (277V)
C4 (480V)



WIRING HARNESS
WH34 (3 WIRE, 4')
WH44 (4 WIRE, 4')
WH54 (5 WIRE, 4')


T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



MOTION SENSOR
WOC (120/277V)
WOC1 (347/480V)

PHOTOMETRICS

IES INDOOR REPORT
PHOTOMETRIC FILENAME: LHB254.IES
POLAR GRAPH



Maximum Candela = 2319 Located At Horizontal Angle = 90, Vertical Angle = 32.5
1 - Vertical Plane Through Horizontal Angles (0 - 270) (Through Max. Cd.)
2 - Horizontal Plane Through Vertical Angle (32.5) (Through Max. Cd.)

ORDERING INFORMATION

Description	Part Number ¹
2L 32W T8 120/277V	LHB232 (A)D(B)
3L 32W T8 120/277V	LHB332 (A)D(B)
4L 32W T8 120/277V	LHB432 (A)D(B)
2L TANDEM ² 32W T8 120/277V	LHBT232 (A)D(B)
3L TANDEM ² 32W T8 120/277V	LHBT332 (A)D(B)
4L TANDEM ² 32W T8 120/277V	LHBT432 (A)D(B)
2L 54W T5 120/277V	LHB254 (A)D(B)
3L 54W T5 120/277V	LHB354 (A)D(B)
4L 54W T5 120/277V	LHB454 (A)D(B)
2L TANDEM ² 54W T5 120/277V	LHBT254 (A)D(B)
3L TANDEM ² 54W T5 120/277V	LHBT354 (A)D(B)
4L TANDEM ² 54W T5 120/277V	LHBT454 (A)D(B)

Option Codes

(A) Housing
U - Uplight
S - Solid

(B) Options

Blank - None
10RS - ≤10% THD, Rapid Start
P - Program Start
20 - ≤20% THD
IO - Inboard/Outboard (2 Lamp-2 Lamp)
IO1 - Inboard/Outboard (1 Lamp-2 Lamp)
IO2 - Inboard/Outboard (1 Lamp-3 Lamp)
IO3 - Inboard/Outboard (3 Lamp-3 Lamp)

MOUNTING

2 Sets of each mount must be ordered per fixture



(3) S HOOKS AND
CHAIN SET
10JC



TONG HANGER
THE (END MOUNT)
THS (SIDE MOUNT)



AIRCRAFT CABLE WITH
12" ARMS
G10 (10')
G12 (12')
G15 (15')

TECHNICAL INFORMATION

Housing is constructed of structurally embossed, heavy gauge, cold rolled steel. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. Hinged and latched for servicing. Ballasts and lamp holders are replaceable without removing from ceiling. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder. Fixture can be mounted using tong hangers, aircraft cables, or stems.

Notes: 1-All part numbers shown on this page come standard with a Miro 4 reflector. 2-The number of lamps in a tandem unit refers to the number of lamps per cross section.