


LLL SERIES

Louvered Linear Fluorescent

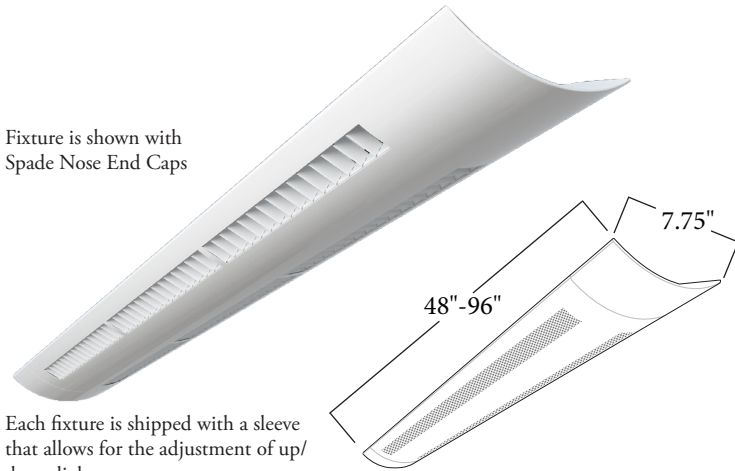

Fixture is shown with Spade Nose End Caps

Each fixture is shipped with a sleeve that allows for the adjustment of up/down light to:
 20% Up / 80% Down;
 60% Up / 40% Down;
 or 100% Down


DESIGN

The LLL Series Louvered Linear Fluorescent fixture is designed for suspension mounting for direct/indirect lighting applications where aesthetics and performance are both required. The fixture is virtually glare and shadow free. The contemporary styling makes it appropriate for offices or other architectural applications.

ACCESSORIES

Order as separate line item

6' 16/3 CORD W/ 15A NEMA PLUG
 C1 (120V)
 C2 (277V)
 C4 (480V)



WIRING HARNESS
 WH34 (3 WIRE, 4')
 WH44 (4 WIRE, 4')
 WH54 (5 WIRE, 4')

T8 EMERGENCY BALLAST
 EB5 (500 LUMEN)
 EB7 (700 LUMEN)
 EB14 (1400 LUMEN)
 EB30 (3000 LUMEN)



SPADE NOSE END CAP (ONE)
 SP²




MOTION SENSOR WOC (120/277V)
 WOC1 (347/480V)



BULL NOSE END CAP (ONE)
 BN²

PHOTOMETRICS

IES INDOOR REPORT
 PHOTOMETRIC FILENAME: LLL364.IES
 POLAR GRAPH



Maximum Candela = 2967 Located At Horizontal Angle = 90, Vertical Angle = 130
 # 1 - Vertical Plane Through Horizontal Angles (00 - 270) (Through Max. Cd.)
 # 2 - Horizontal Plane Through Vertical Angle (130) (Through Max. Cd.)

TECHLIGHT

All specifications are subject to change without notice. Please refer to www.techlightusa.com for the most current information.

ORDERING INFORMATION

Description	Part Number
2L 32W T8 120/277V	LLL232(A)D(B)
2L 54W T5HO 120/277V	LLL254(A)D(B)
2L 96W T8 120/277V	LLL296T8(A)D(B)
2L TANDEM ¹ 32W T8 120/277V	LLLT232(A)D(B)
2L TANDEM ¹ 54W T5HO 120/277V	LLLT254(A)D(B)
3L 32W T8 120/277V	LLL332(A)D(B)
3L 54W T5HO 120/277V	LLL354(A)D(B)
3L 96W T8 120/277V	LLL3296T8(A)D(B)
3L TANDEM ¹ 32W T8 120/277V	LLLT332(A)D(B)
3L TANDEM ¹ 54W T5HO 120/277V	LLLT354(A)D(B)

Option Codes

(A) Louver Finish

Blank - Aluminum
 W - White

(B) Options

Blank - None
 10RS - ≤10% THD, Rapid Start
 P - Program Start
 20 - ≤20% THD

MOUNTING

2 Sets of each mount must be ordered per fixture



(3)S HOOKS AND CHAIN SET
 10JC



TONG HANGER
 THE (END MOUNT)
 THS (SIDE MOUNT)



AIRCRAFT CABLE WITH 12" ARMS
 G10 (10')
 G12 (12')
 G15 (15')



PENDANT MOUNT WITH NO WIRE WAY
 PMNW



PENDANT MOUNT WITH WIRE WAY
 PMWW

TECHNICAL INFORMATION

Constructed of heavy gauge roll formed steel with a louvered direct/indirect shield. Designed to be suspension or pendant mounted on exact 4' and 8' centers. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Can be mounted as single fixture or in a continuous row. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

Notes: 1-The number of lamps referred to in the description is the number of lamps per cross section. There are two cross sections in a tandem fixture. 2-Order individually based on row configurations.

2707 SATSUMA DR • DALLAS, TX 75229