


## PT SERIES


### Parabolic Troffer

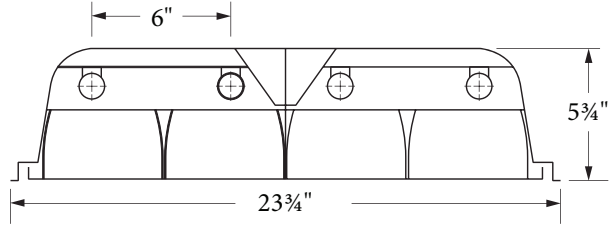

## DESIGN


The PT Series Parabolic Troffer was designed for recessed ceiling mounting. It features glare reducing cell louver technology. It was designed for both durability and economy. The PT Series is ideal for a variety of applications such as offices, schools, or retail applications.

## ACCESSORIES


-  6' 16/3 CORD w/ 15A NEMA PLUG  
C1 (120V)  
C2 (277V)  
C4 (480V)
-  T8 EMERGENCY BALLAST  
EB5 (500 LUMEN)  
EB7 (700 LUMEN)  
EB14 (1400 LUMEN)  
EB30 (3000 LUMEN)
-  MOTION SENSOR  
WOC (120/277V)  
WOC1 (347/480V)

## PHOTOMETRICS

IES INDOOR REPORT  
PHOTOMETRIC FILENAME : TH8632.IES  
POLAR GRAPH



IES INDOOR REPORT  
PHOTOMETRIC FILENAME : TH8654.IES  
POLAR GRAPH



Maximum Candela = 6191 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5  
# 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

Maximum Candela = 9247 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5  
# 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)


## ORDERING INFORMATION

Description	Part Number
1X4 8C 2L 32W T8 120/277V	PT1232B82D (A)
2X2 9C 3L 17W T8 120/277V	PT22317BB92D (A)
2X2 9C 2L 32W T8 U 120/277V	PT222U316B92D (A)
2X4 18C 3L 28W T5 120/277V	PT2328T5B182D (A)
2X4 18C 3L 32W T8 120/277V	PT2332B182D (A)
2X4 18C 3L 54W T5HO 120/277V	PT2354B182D (A)

- Option Codes**  
**(A) Options**  
 Blank - None  
 10RS - ≤10% THD, Rapid Start  
 P - Program Start  
 20 - ≤20% THD  
 IC - Insulation Contact Rated  
 IO - Inboard/Outboard (2 Lamp-2 Lamp)  
 IO2 - Inboard/Outboard (1 Lamp-3 Lamp)

All part numbers shown here include specular silver louvers.

## SHIELDS

-  FLANGE KIT  
FK14 (1x4)  
FK22 (2x2)  
FK24 (2x4)

## TECHNICAL INFORMATION

Housing is constructed of structurally embossed, heavy gauge, cold rolled steel. Die-formed flat steel door with mitered corners for a clean appearance. Nominal 3" deep louver for cutoff and glare control. Wire way covers snap in for easy attachment and removal. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.