



Catalog Number	
Project	Type

## Features & Specifications

### Features

- Compact, low-profile design in neutral finish
- Universal mounting plate with EZ Quick Connect for fast installation
- Remote Capable
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### Electrical

- Unit can operate a total of 20W for a minimum of 90 minutes
- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 7.2Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

### Mounting

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Conduit mount using knockouts on back plate

### Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish

### Illumination

- Two fully adjustable 5.4W glare-free lamp heads
- High-performance smooth thermoplastic reflector and plastic lens for optimal light distribution
- Provides 11W of remote capability


### Warranty

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

## R-1RC SERIES REMOTE CAPABLE MR-16 EMERGENCY LIGHT



### DIMENSIONS

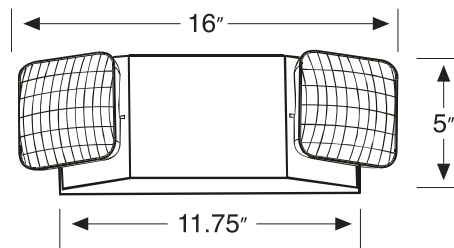

Please contact your Horizon Sales Representative for more information.

### Ordering Nomenclature

Ex: (Remote Capable Emergency Light, White Housing = R-1RCW)

<b>R-1RC</b>			
SERIES R-1RC	HOUSING COLOR W - White B - Black	ACCESSORIES SD - Self Diagnostic CP - Cord and Plug K9- 9W Krypton Lamps T9 - 9W Tungston Lamps HL - High Lumen Output	