



Catalog Number	
Project	Type

Features & Specifications

Features

- Provides 11W of remote wattage
- Energy-efficient LED technology
- EZ snap-out chevron direction indicators
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board/remote lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Mounting

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish


Illumination

- Ultra-bright, energy efficient, long-life Red or Green LED
- Offers 11W of remote capability

Warranty

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

RLE SERIES REMOTE CAPABLE LED EXIT SIGN

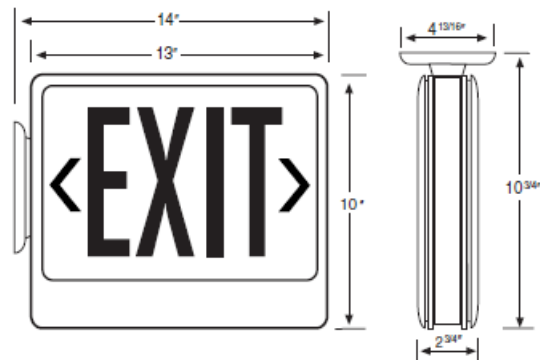

DIMENSIONS

Please contact your Horizon Sales Representative for more information.

Ordering Nomenclature

Ex: (Remote Capable LED Exit Sign, Red Letters, Double Face, White Housing = RLER2W-RC)

RLE					
SERIES RLE	LETTER COLOR R - Red G - Green	NUMBER OF FACES 2 - Double Face	HOUSING COLOR W - White B - Black	BATTERY RC - Remote Capable	ACCESSORIES SD - Self Diagnostic HT - Internal Heater