


# SHB SERIES

## Standard High Bay

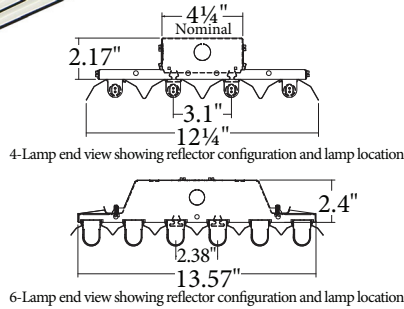

### DESIGN

The SHB Standard High Bay is designed for industrial, institutional, and commercial applications as a direct replacement for HID fixtures (Up to 50% savings compared to a 400W MH fixture). Perfect for warehouse, retail, or manufacturing applications.

### ACCESSORIES

Order as separate line item

**6' 16/3 CORD W/ 15A NEMA PLUG**  
 C1 (120V)  
 C2 (277V)  
 C4 (480V)


**T8 EMERGENCY BALLAST**  
 EB5 (500 LUMEN)  
 EB7 (700 LUMEN)  
 EB14 (1400 LUMEN)  
 EB30 (3000 LUMEN)

**MOTION SENSOR**  
 WOC (120/277V)  
 WOC1 (347/480V)

**WIRE GUARD**  
 HBWG4 (4 LAMP)  
 HBWG6 (6 LAMP)


### PHOTOMETRICS

IES INDOOR REPORT  
 PHOTOMETRIC FILENAME : SHB432.IES  
 POLAR GRAPH



Maximum Candela = 6191 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5  
 # 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

IES INDOOR REPORT  
 PHOTOMETRIC FILENAME : SHB654.IES  
 POLAR GRAPH



Maximum Candela = 9247 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5  
 # 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

### ORDERING INFORMATION

Description	Part Number
4L 32W T8 120/277V	SHB432D (A)
6L 32W T8 120/277V	SHB632D (A)
8L 32W T8 120/277V	SHB832D (A)
4L 54W T5 120/277V	SHB454D (A)
4L 54W T5 480V	SHB4544 (A)
6L 54W T5 120/277V	SHB654D (A)
6L 54W T5 480V	SHB6544 (A)
8L 54W T5 120/277V	SHB854D (A)

#### Option Codes

##### (A) Options

- Blank - None
- 10RS - ≤10% THD, Rapid Start
- P - Program Start
- 20 - ≤20% THD
- IO - Inboard/Outboard (2 Lamp-2 Lamp)
- IO2 - Inboard/Outboard (1 Lamp-3 Lamp)
- IO3 - Inboard/Outboard (3 Lamp-3 Lamp)

### MOUNTING

2 Sets of each mount must be ordered per fixture



(3)S HOOKS AND  
 CHAIN SET  
 10JC



TONG HANGER  
 THE (END MOUNT)  
 THS (SIDE MOUNT)



AIRCRAFT CABLE WITH  
 12" ARMS  
 G10 (10')  
 G12 (12')  
 G15 (15')

### TECHNICAL INFORMATION

Housing is constructed of heavy gauge roll formed steel. Optimized for T8 or T5 lamp performance. Miro 4 reflector standard. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. All fixtures are post painted.