


SMHB SERIES

Surface Mount High Bay

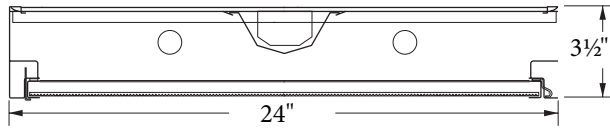

DESIGN

The SMHB Surface Mount High Bay was designed for cost effective lighting of warehouse, manufacturing plants, sports facilities, and retail environments. Designed for surface or stem mounting applications that require a low profile architectural finish.

ACCESSORIES

Order as separate line item



6' 16/3 CORD W/ 15A NEMA PLUG
C1 (120V)
C2 (277V)
C4 (480V)



WIRE GUARD SMHBWG6




T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



MOTION SENSOR
WOC (120/277V)
WOC1 (347/480V)


PHOTOMETRICS

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SMHB632.IES
POLAR GRAPH



Maximum Candela = 6191 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5
#1 - Vertical Plane Through Horizontal Angles (22.5, 202.5) (Through Max. Cd.)
#2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SMHB654.IES
POLAR GRAPH



Maximum Candela = 9247 Located At Horizontal Angle = 22.5, Vertical Angle = 2.5
#1 - Vertical Plane Through Horizontal Angles (22.5, 202.5) (Through Max. Cd.)
#2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

ORDERING INFORMATION

Description	Part Number
4L 28W T8 120/277V	SMHB428T8F1D (A)
6L 28W T8 120/277V	SMHB628T8F1D (A)
4L 32W T8 120/277V	SMHB432F1D (A)
6L 32W T8 120/277V	SMHB632F1D (A)
4L 28W T5 120/277V	SMHB428T5F1D (A)
6L 28W T5 120/277V	SMHB628T5F1D (A)
4L 54W T5 120/277V	SMHB454F1D (A)
6L 54W T5 120/277V	SMHB654F1D (A)

Option Codes

(A) Options

Blank - None
10RS - ≤10% THD, Rapid Start
P - Program Start
20 - ≤20% THD
IO - Inboard/Outboard (2 Lamp-2 Lamp)
IO2 - Inboard/Outboard (1 Lamp-3 Lamp)
IO3 - Inboard/Outboard (3 Lamp-3 Lamp)

MOUNTING

2 Sets of each mount must be ordered per fixture



(3)S HOOKS AND CHAIN SET
10JC



AIRCRAFT CABLE WITH 12" ARMS
G10 (10')
G12 (12')
G15 (15')

TECHNICAL INFORMATION

Housing is constructed of structurally embossed, heavy gauge, cold rolled steel. Die-formed flat steel door with mitered corners for a clean appearance. Wire way covers snap in for easy attachment and removal. Access plate provides top access to wire way. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

Notes: 1-All part numbers shown on this page come standard with a .125" Clear Polycarbonate Lens.