


SMP SERIES

Surface Mount Parabolic

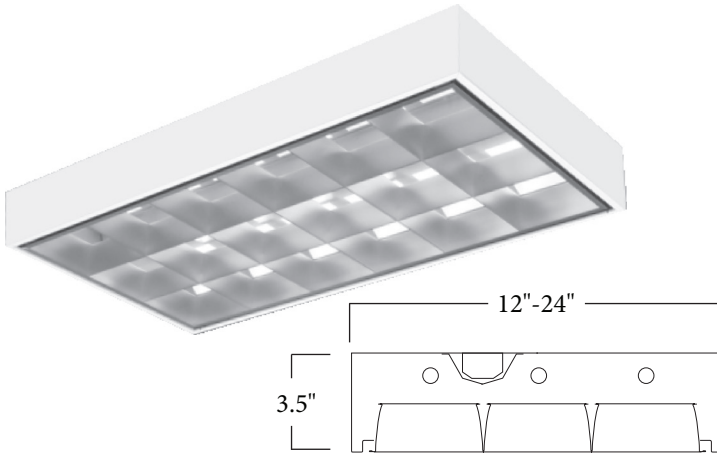

ORDERING INFORMATION

| Description | Part Number |
|------------------------------|-------------------|
| 1X4 8C 2L 32W T8 120/277V | SMP1232B82D(A) |
| 2X2 9C 3L 17W T8 120/277V | SMP22317BB92D(A) |
| 2X2 9C 2L 32W T8 U 120/277V | SMP222U316B92D(A) |
| 2X4 18C 3L 28W T5 120/277V | SMP2328T5B182D(A) |
| 2X4 18C 3L 32W T8 120/277V | SMP2332B182D(A) |
| 2X4 18C 3L 54W T5HO 120/277V | SMP2354B182D(A) |

Option Codes

| (A) Options | |
|-------------|------------------------------------|
| Blank | - None |
| 10RS | - ≤10% THD, Rapid Start |
| P | - Program Start |
| 20 | - ≤20% THD |
| IO | - Inboard/Outboard (2 Lamp-2 Lamp) |
| IO2 | - Inboard/Outboard (1 Lamp-3 Lamp) |

All part numbers shown here include specular silver louvers.

DESIGN

The SMP Series Surface Mount Parabolic was designed for surface or stem mounting. It features glare reducing cell louver technology. It was designed for both durability and economy. The SMP Series is ideal for a variety of applications such as offices, schools, or retail applications.

ACCESSORIES


6' 16/3 CORD W/ 15A NEMA PLUG
C1 (120V)
C2 (277V)
C4 (480V)

T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)

MOTION SENSOR
WOC (120/277V)
WOC1 (347/480V)


PHOTOMETRICS

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SMP1232B82.IES
POLAR GRAPH



Maximum Candela = 1674 Located At Horizontal Angle = 90, Vertical Angle = 15
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (90) (Through Max. Cd.)

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SMP2332B182.IES
POLAR GRAPH



Maximum Candela = 2901 Located At Horizontal Angle = 90, Vertical Angle = 35
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (90) (Through Max. Cd.)

TECHNICAL INFORMATION

Housing is constructed of structurally embossed, heavy gauge, cold rolled steel. Die-formed flat steel door with mitered corners for a clean appearance. Nominal 3" deep louver for cutoff and glare control. Wire way covers snap in for easy attachment and removal. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.