



Catalog Number	
Project	Type

Features & Specifications

Application

The Turret Strip is a heavy duty industrial strip that is well suited for interior warehouse, retail and utility areas requiring concentrated illumination in an industrial quality configuration.

Features

Optimized for T8 or T5 lamp performance. Heavy duty, specification grade, deep body industrial strip with embossed steel reflectors. Accepts optional plug-in wiring feature for continuous row installation. Can be surface or pendant mounted, individual or in rows. Lamps secured with screw for vibration. Numerous KO's for easy installation.

Construction

Fixture housing, lamp holder brackets, end sections and channel over constructed of heavy gauge die-formed steel.





Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.

Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

TS SERIES TURRET STRIP, MINI BODY

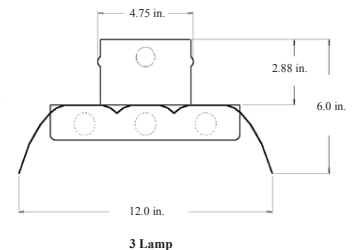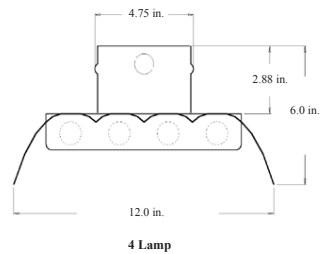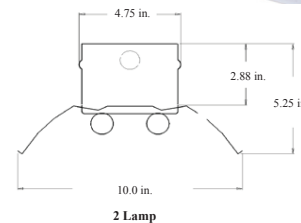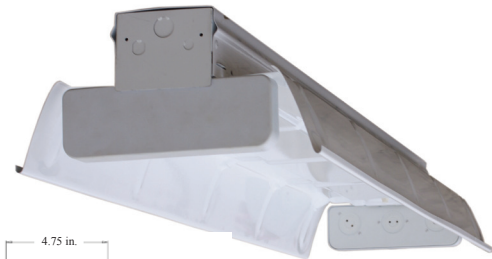

DIMENSIONS



Made in the USA

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Turret Strip, 2 Lamp, F32T8, 4', Solid Reflector, Multi-Volt =TS232SD)

--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	REFLECTOR	VOLTAGE	BALLAST FACTOR	OPTIONS
TS For tandem double-length unit, add suffix T Ex: TST	2 3 4	28T5 - 28W T5, 46"	S - Solid U - Uplight	D - Multi-Volt 1 - 120V 2 - 277V 3 - 347V 4 - 480V *Multi-Volt is 120/277V	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start
		28T8 - 28W T8, 48"				P - Program Start
		32 - 32W T8, 48"				20 - ≤20% THD
		48HO - 60W 800mA, 48"				EB5 - 500 Lumen T8 Emergency Ballast
		54 - 54W T5HO, 46"				EB7 - 700 Lumen T8 Emergency Ballast
		96HO - 86W T8HO, 96"				EB14 - 1400 Lumen T8 Emergency Ballast
						EB30 - 3000 Lumen T8 Emergency Ballast
						EB5T5 - 500 Lumen T5 Emergency Ballast
						EB7T5 - 700 Lumen T5 Emergency Ballast
						EB14T5 - 1400 Lumen T5 Emergency Ballast
						FBF - Fast-Blow Fuse
						SBF - Slow-Blow Fuse
						AC63 - 6', 3/8" dia., Armored Flex Cable
						SJ6 - 6', 3/8" dia., 16/3 SJ Cord
						SJ10 - 10', 3/8" dia., 16/3 SJ Cord
						SJ15 - 15', 3/8" dia., 16/3 SJ Cord
						PWO - Palletized without Cartons
						CD - Continuous Dimming (T8)
						SD - Step Dimming (T8)
						CD5 - Continuous Dimming (T5)
						SD5 - Step Dimming (T5)
						WOC - 120/347 Volt Sensor
						WOC1 - 480 Volt Sensor
						C1 - 6' Cord w/120V Nema Plug 16/3 15A
						C2 - 6' Cord w/277V Nema Plug 16/3 15A
						C3 - 10' Cord w/277V Nema Plug 16/3 20A
						C4 - 6' Cord w/480V Nema Plug 16/3 20A
						WH34-Wiring Harness 3-Wire 4-Foot
						WH44-Wiring Harness 4-Wire 4-Foot


ADDITIONAL OPTIONS

WH54- Wiring Harness 5-Wire 4-Foot
WH38- Wiring Harness 3-Wire 8-Foot
WH48- Wiring Harness 4-Wire 8-Foot
WH58- Wiring Harness 5-Wire 8-Foot
10JC - (3)S Hooks and 10' Jack Chain Set
THE - Tong Hanger, End Mount (2)
THS - Tong Hanger, Side Mount (2)

G10 - 10' Aircraft Cable w/ 12" Arms (2)
G15 - 15' Aircraft Cable w/ 12" Arms (2)
G20 - 20' Aircraft Cable w/ 12" Arms (2)
TSWG4- 4' Wire Guard

Energy Saving Tip!
Our Occupancy Sensor option instantly turns lights on and off

POLAR GRAPH

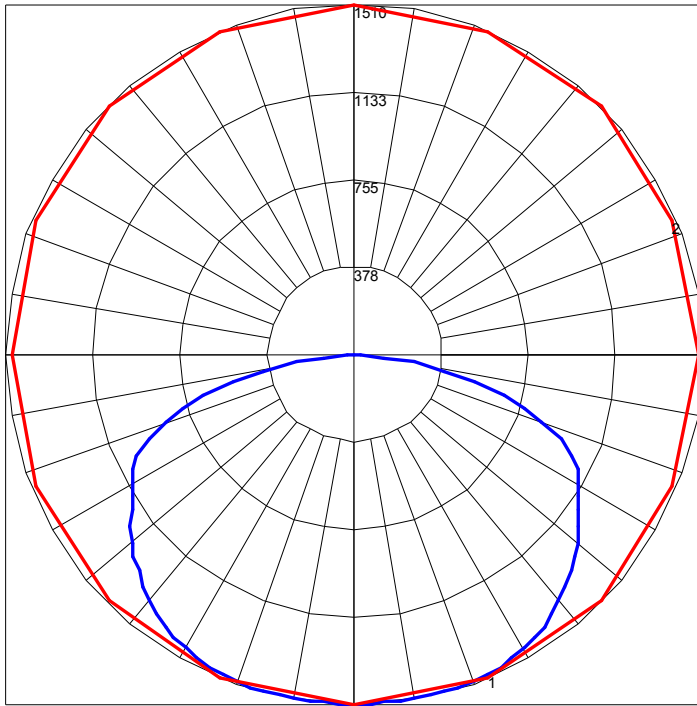

Maximum Candela = 1510 Located At Horizontal Angle = 90, Vertical Angle = 7.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)