



LED Series Information

Features:

Housing Manufactured of Heavy Duty Die-cast Aluminum With a Textured Architectural White, Bronze, or Black Powdercoat Finish over a Chromate Conversion Coating for Durability

Weatherproof Silicone Gasket Present for Moisture And Dust Proof Protection

Fixture Includes an Anodized Aluminum Reflector and High Impact Heat Resistant Tempered Glass Bottom and Molded Oval Glass Upper Lenses For Optimal Light Distribution

Fixture Wall Mounts Directly Over 4" Outlet Box, Includes Easy-Hang "Two Hands Free" Wall Mounting Bracket

CSA Listed for Wet Locations

Custom Colors Available

Applications:

- Warehouse Facilities
- Shipping and Receiving Areas
- Cold Storage Facilities
- Industrial Plants
- Commercial Buildings

Options:


**Crescent Wallpack -
Up/Down Light**



WP36L



Dimensions:

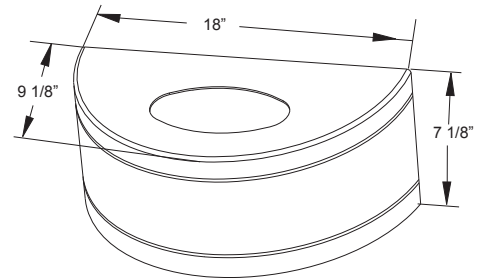

LED Series Order Information

Typical Ordering Number:
WP36L-2X15-Q-4-6-PC1

Model#	Total Watts	Ballast	Color Temp	Optics	Options
WP36L	2X7H =2x7.5w (15w) * 3X7H =3x7.5w (22.5w) * 4X7H =4x7.5w (30w) * 5X7H =5x7.5w (37.5w) * 3X15 =3x15w (45w) *	Q = Quad Tap	2 = 2700k 3 = 3000k 4 = 4000k	N = None 2 = 20° 4 = 40° 6 = 60°	BZ = Bronze WH = White BK = Black
	*40 LPW (Lumens per watt)				



Accessories



Optic Options:
(2) 20° beam
(4) 40° beam
(6) 60° beam

LED Information

"GREEN" ENERGY EFFICIENCY:

Cost of ownership (life and efficacy advantages) - 2 year payback possible

Long life (50,000 hrs) – reliability, sustained image

No mercury or lead

FAST SHIPPING

Large Inventory of
LED MODULES & DRIVERS
IN STOCK

TECHNICAL:

Good quality white light (Ra 80+)

Choice of Color Temperatures (2700K, 3000K and 4000K)

50Hz-60Hz

Choice of operation: can be run as low as 350mA for maximum efficacy and up to 700mA for maximum output

Possibilities include: sharp beam cut-off optics, very low profile spot and flood optics (<20mm), and adjustable beam shaping

Minimal heat (IR) in the beam – can be placed close to merchandise

Fully dimmable (analog or digital)

Uniform beam (intensity and color temperature - no yellow ring or color shadows)

Color point consistency part to part and through life

Universal operating position

Extremely low UV- perfect for high value items sensitive to UV

Light Emitting Diode is fully enclosed, providing an IP 66 rating.