



| | |
|----------------|------|
| Catalog Number | |
| Project | Type |

Features & Specifications

Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms, utility/area, and task lighting.

Features

Optimized for T8 lamp performance. To direct illumination up or down, fixture is equipped with a matching metal front.

Construction

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with a smooth white lens.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall. Comes standard with ballast disconnects for safe maintenance.



Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV337 SERIES WALL / VANITY 337



DIMENSIONS

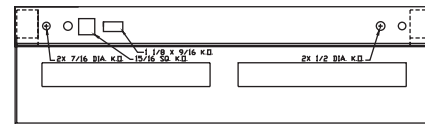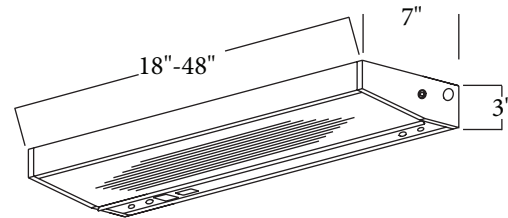

Top Up Light



Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wall Vanity 337, 1 Lamp, F32T8, 48", White finish, Multi-Volt = WV33713248SWD)

| | | | | | | | |
|--|--|--|--|--|--|--|--|
| | | | | | | | |
|--|--|--|--|--|--|--|--|

| SERIES | NUMBER OF LAMPS | WATTAGE | LENGTH | DIFFUSER | VOLTAGE | BALLAST FACTOR | OPTIONS |
|--------|-----------------|-------------------------|----------|----------------------|-------------------------|----------------|-------------------------------------|
| WV337 | 1 | 15 - 15 watt T8 (18") | 18 - 18" | SW - Smooth White | D - Multi-Volt | BLANK - Normal | 10RS - ≤10% THD, Rapid Start |
| | 2 | 17 - 17 watt T8 (24") | 24 - 24" | CP - Clear Prismatic | 1 - 120V | H - High | P - Program Start |
| | | 25 - 25 watt T8 (36") | 36 - 36" | | 2 - 277V | L - Low | 20 - ≤20% THD |
| | | 32 - 32 watt T8 (48") | 48 - 48" | | 3 - 347V | | EB5 - 500 Lumen Emergency Ballast |
| | | 28T8 - 28 watt T8 (48") | | | 4 - 480V | | EB7 - 700 Lumen Emergency Ballast |
| | | *CFL - SPECIAL ORDER | | | *Multi-Volt is 120/277V | | EB14 - 1400 Lumen Emergency Ballast |
| | | | | | | | EB30 - 3000 Lumen Emergency Ballast |
| | | | | | | | FBF - Fast-Blow Fuse |
| | | | | | | | SBF - Slow-Blow Fuse |
| | | | | | | | PC - Pull Chain |
| | | | | | | | RS - Rocker Switch |
| | | | | | | | CO - Convenience Outlet |