

WALL / VANITY

ORDERING NOMENCLATURE



CONSTRUCTION

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with acrylic lens. ETL listed for damp locations.

ORDERING NOMENCLATURE

(Ex: WV102 WALL/VANITY, 1 LAMP, 32W T8, 48", CHROME END CAPS, MULTI-VOLT = WV10213248CD)

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	END CAP FINISH	BALLAST FACTOR
WV102 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	D = Multi-Volt*	W = White	BLANK = Normal
		17 = 17 watt T8 (24")	24 = 24"	1 = 120V	C = Chrome	H = High
		25 = 25 watt T8 (36")	36 = 36"	2 = 277V		L = Low
		32 = 32 watt T8 (48")	48 = 48"	3 = 347V		
		28T8 = 28 watt T8 (48")		4 = 480V		
		*CFL = SPECIAL ORDER		(*Multi-Volt is 120/277V)		

OPTICAL SYSTEM

Low glare, extruded acrylic lenses. Internal up/down reflectors are available on some models. Designed for task lighting and general illumination.

ELECTRICAL SYSTEM

Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from walls. Discrete voltage must be specified for emergency pack options.

MOUNTING

These fixtures are designed for wall mounting

FINISH

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder. Custom finishes are available upon request.

W a l l / V a n i t y

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	VOLTAGE	END CAP FINISH	BALLAST FACTOR
WV203 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	SW = Smooth White	D = Multi-Volt* 1 = 120V 2 = 277V 3 = 347V 4 = 480V	W = White C = Chrome	BLANK = Normal H = High L = Low
	2	17 = 17 watt T8 (24")	24 = 24"				
		25 = 25 watt T8 (36")	36 = 36"				
		32 = 32 watt T8 (48")	48 = 48"				
		28T8 = 28 watt T8 (48") *CFL = SPECIAL ORDER					

(*Multi-Volt is 120/277V)

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	VOLTAGE	END CAP FINISH	BALLAST FACTOR
WV205 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	SW = Smooth White	D = Multi-Volt* 1 = 120V 2 = 277V 3 = 347V 4 = 480V	W = White C = Chrome	BLANK = Normal H = High L = Low
	2	17 = 17 watt T8 (24")	24 = 24"				
		25 = 25 watt T8 (36")	36 = 36"				
		32 = 32 watt T8 (48")	48 = 48"				
		28T8 = 28 watt T8 (48") *CFL = SPECIAL ORDER					

(*Multi-Volt is 120/277V)

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	VOLTAGE	END CAP FINISH	BALLAST FACTOR
WV207 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	SW = Smooth White CP = Clear Prismatic	D = Multi-Volt* 1 = 120V 2 = 277V 3 = 347V 4 = 480V	W = White C = Chrome	BLANK = Normal H = High L = Low
	2	17 = 17 watt T8 (24")	24 = 24"				
		32 = 32 watt T8 (48")	48 = 48"				
		28T8 = 28 watt T8 (48")					
		*CFL = SPECIAL ORDER					

(*Multi-Volt is 120/277V)

W a l l / V a n i t y

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	END CAP FINISH	VOLTAGE	BALLAST FACTOR
WV213 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	SW = Smooth	W = White	D = Multi-Volt*	BLANK = Normal
	2	17 = 17 watt T8 (24")	24 = 24"	White	C = Chrome	1 = 120V	H = High
		25 = 25 watt T8 (36")	36 = 36"	CP = Clear	WL= Walnut	2 = 277V	L = Low
		32 = 32 watt T8 (48")	48 = 48"	Prismatic	O = Oak	3 = 347V	
		28T8 = 28 watt T8 (48")			B = Brass	4 = 480V	
		*CFL = SPECIAL ORDER				(*Multi-Volt is 120/277V)	

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	END CAP FINISH	VOLTAGE	BALLAST FACTOR
WV216 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	SW = Smooth	W = White	D = Multi-Volt*	BLANK = Normal
	2	17 = 17 watt T8 (24")	24 = 24"	White	C = Chrome	1 = 120V	H = High
		32 = 32 watt T8 (48")	48 = 48"	CP = Clear	WL= Walnut	2 = 277V	L = Low
		28T8 = 28 watt T8 (48")		Prismatic	O = Oak	3 = 347V	
			*CFL = SPECIAL ORDER		B = Brass	4 = 480V	
						(*Multi-Volt is 120/277V)	

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	VOLTAGE	BALLAST FACTOR
WV335 Wall/Vanity	1	15 = 15 watt T8 (18")	18 = 18"	SW = Smooth	D = Multi-Volt*	BLANK = Normal
	2	17 = 17 watt T8 (24")	24 = 24"	White	1 = 120V	H = High
		25 = 25 watt T8 (36")	36 = 36"	CP = Clear	2 = 277V	L = Low
		32 = 32 watt T8 (48")	48 = 48"	Prismatic	3 = 347V	
		28T8 = 28 watt T8 (48")			4 = 480V	
		*CFL = SPECIAL ORDER			(*Multi-Volt is 120/277V)	

WALL / VANITY

W a l l / V a n i t y

SERIES WV337 Wall/Vanity	NUMBER OF LAMPS 1 2	WATTAGE 15 = 15 watt T8 (18") 17 = 17 watt T8 (24") 25 = 25 watt T8 (36") 32 = 32 watt T8 (48") 28T8 = 28 watt T8 (48") *CFL = SPECIAL ORDER	LENGTH 18 = 18" 24 = 24" 36 = 36" 48 = 48"	VOLTAGE SW = Smooth White CP = Clear Prismatic	VOLTAGE D = Multi-Volt* 1 = 120V 2 = 277V 3 = 347V 4 = 480V (*Multi-Volt is 120/277V)	BALLAST FACTOR BLANK = Normal H = High L = Low
---------------------------------------	----------------------------------	---	---	---	--	--


SERIES WV760 Wall/Vanity	NUMBER OF LAMPS 1 2	WATTAGE 15 = 15 watt T8 (18") 17 = 17 watt T8 (24") 25 = 25 watt T8 (36") 32 = 32 watt T8 (48") 28T8 = 28 watt T8 (48") *CFL = SPECIAL ORDER	LENGTH 18 = 18" 24 = 24" 36 = 36" 48 = 48"	VOLTAGE D = Multi-Volt* 1 = 120V 2 = 277V 3 = 347V 4 = 480V (*Multi-Volt is 120/277V)	BALLAST FACTOR BLANK = Normal H = High L = Low
---------------------------------------	----------------------------------	---	---	--	--

SERIES WV1500 Wall/Vanity	NUMBER OF LAMPS 1 2	WATTAGE 17 = 17 watt T8 (25") 25 = 25 watt T8 (37") 32 = 32 watt T8 (49") 28T8 = 28 watt T8 (49") *CFL = SPECIAL ORDER	LENGTH 25 = 25" 37 = 37" 49 = 49"	FINISH W = White B = Black	VOLTAGE D = Multi-Volt* 1 = 120V 2 = 277V 3 = 347V 4 = 480V (*Multi-Volt is 120/277V)	BALLAST FACTOR BLANK = Normal H = High L = Low
--	----------------------------------	--	---	---	--	--

W A L L / V A N I T Y

WV102 SERIES

Vanity Wall Bracket

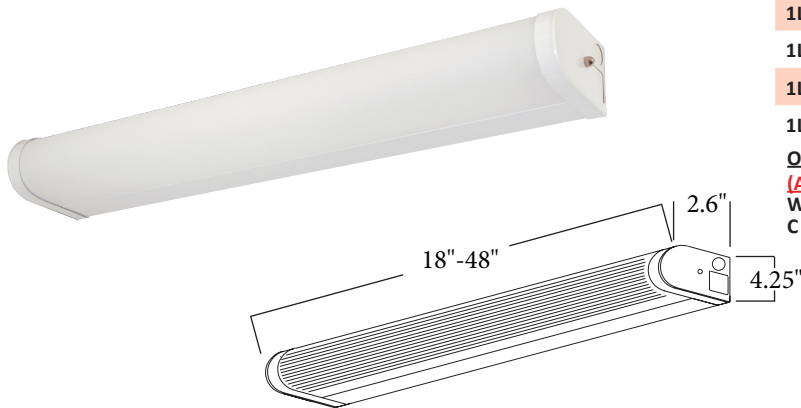

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV10211518D(A)(B)
1L 24" 17W T8 120/277V	WV10211724D(A)(B)
1L 36" 25W T8 120/277V	WV10212536D(A)(B)
1L 48" 28W T8 120/277V	WV102128T848D(A)(B)
1L 48" 32W T8 120/277V	WV10213248D(A)(B)

Option Codes

(A) End Caps

- W - White Ends
- C - Chrome Ends

(B) Options

- Blank - None
- 10RS - ≤10% THD, Rapid Start
- P - Program Start
- 20 - ≤20% THD

DESIGN

The WV102 Series Vanity Wall Bracket is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC



CONVENIENCE OUTLET
WITH GFCI
CO2




ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Ribbed white acrylic diffuser. Wall or ceiling mounted. White or chrome ends available. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV203 SERIES

Vanity Wall Bracket

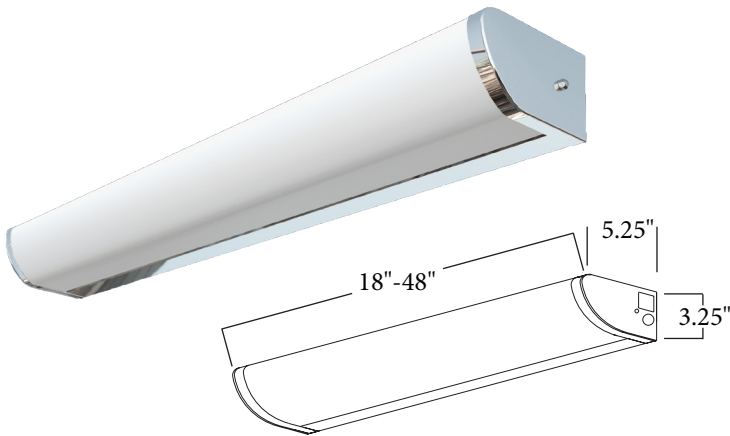

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV20311518SWD(A)(B)
1L 24" 17W T8 120/277V	WV20311724SWD(A)(B)
1L 36" 25W T8 120/277V	WV20312536SWD(A)(B)
1L 48" 28W T8 120/277V	WV203128T848SWD(A)(B)
1L 48" 32W T8 120/277V	WV20313248SWD(A)(B)

Option Codes

(A) End Caps

W - White Ends
C - Chrome Ends

(B) Options


Blank - None
10RS - ≤10% THD, Rapid Start
P - Program Start
20 - ≤20% THD

DESIGN

The WV203 Series Vanity Wall Bracket is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC
3-STEP PULL CHAIN
PC3



CONVENIENCE OUTLET WITH GFCI
CO2




ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Smooth white acrylic diffuser. Wall or ceiling mounted. White or chrome ends available. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV205 SERIES

Vanity Wall Bracket

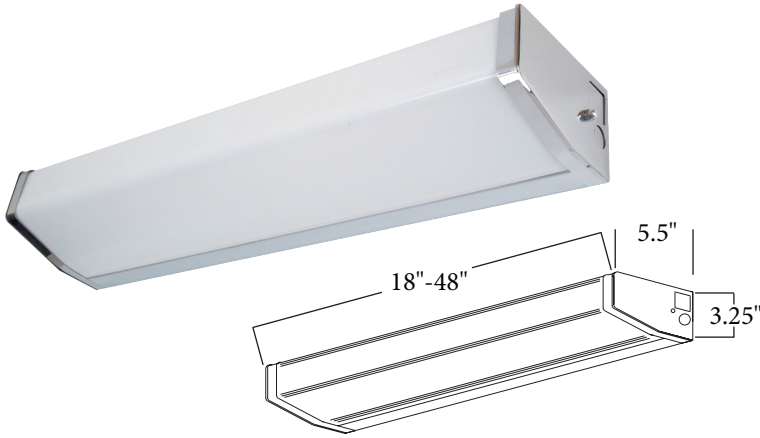

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV20511518SWD(A)(B)
1L 24" 17W T8 120/277V	WV20511724SWD(A)(B)
1L 36" 25W T8 120/277V	WV20512536SWD(A)(B)
1L 48" 28W T8 120/277V	WV205128T848SWD(A)(B)
1L 48" 32W T8 120/277V	WV20513248SWD(A)(B)
2L 18" 15W T8 120/277V	WV20521518SWD(A)(B)
2L 24" 17W T8 120/277V	WV20521724SWD(A)(B)
2L 36" 25W T8 120/277V	WV20522536SWD(A)(B)
2L 48" 28W T8 120/277V	WV205228T848SWD(A)(B)
2L 48" 32W T8 120/277V	WV20523248SWD(A)(B)

Option Codes

(A) End Caps

W - White Ends
C - Chrome Ends

(B) Options

Blank - None
10RS - ≤10% THD, Rapid Start
P - Program Start
20 - ≤20% THD

DESIGN

The WV205 Series Vanity Wall Bracket is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC
3-STEP PULL CHAIN
PC3



CONVENIENCE OUTLET
WITH GFCI
CO2




ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Smooth white acrylic diffuser. Wall or ceiling mounted. White or chrome ends available. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV207 SERIES

Vanity Wall Bracket

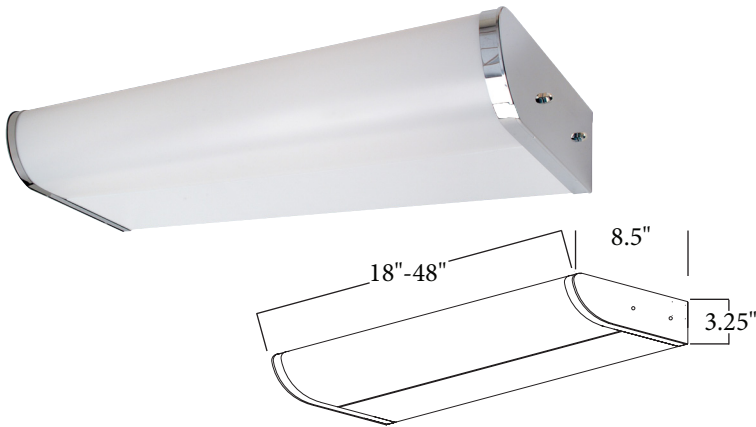

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV20711518SWD (A) (B)
1L 24" 17W T8 120/277V	WV20711724SWD (A) (B)
1L 48" 28W T8 120/277V	WV207128T848SWD (A) (B)
1L 48" 32W T8 120/277V	WV20713248SWD (A) (B)
2L 18" 15W T8 120/277V	WV20721518SWD (A) (B)
2L 24" 17W T8 120/277V	WV20721724SWD (A) (B)
2L 48" 28W T8 120/277V	WV207228T848SWD (A) (B)
2L 48" 32W T8 120/277V	WV20723248SWD (A) (B)

Option Codes

(A) End Caps

W - White Ends
C - Chrome Ends

(B) Options

Blank - None
10RS - ≤10% THD, Rapid Start
P - Program Start
20 - ≤20% THD

DESIGN

The WV207 Series Vanity Wall Bracket is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC
3-STEP PULL CHAIN
PC3



CONVENIENCE OUTLET
WITH GFCI
CO2




ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Smooth white acrylic diffuser. Wall or ceiling mounted. White or chrome ends available. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV213 SERIES

Vanity Wall Bracket

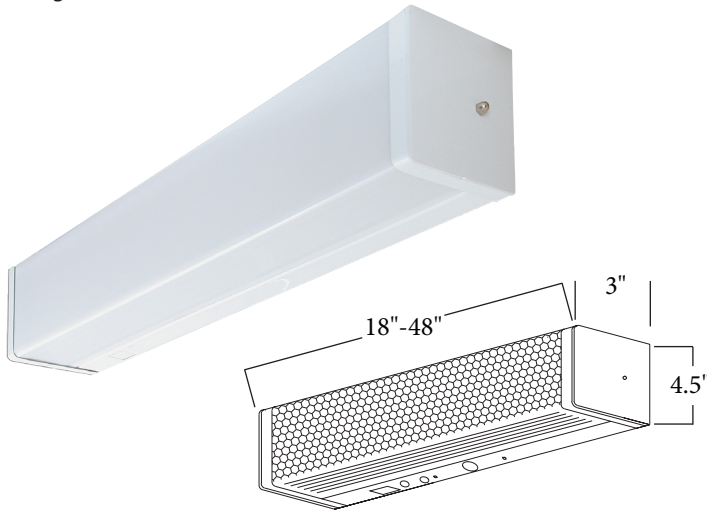

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV21311518SWD(A)(B)
1L 24" 17W T8 120/277V	WV21311724SWD(A)(B)
1L 36" 25W T8 120/277V	WV21312536SWD(A)(B)
1L 48" 28W T8 120/277V	WV213128T848SWD(A)(B)
1L 48" 32W T8 120/277V	WV21313248SWD(A)(B)
2L 18" 15W T8 120/277V	WV21321518SWD(A)(B)
2L 24" 17W T8 120/277V	WV21321724SWD(A)(B)
2L 36" 25W T8 120/277V	WV21322536SWD(A)(B)
2L 48" 28W T8 120/277V	WV213228T848SWD(A)(B)
2L 48" 32W T8 120/277V	WV21323248SWD(A)(B)

Option Codes

(A) End Caps

W - White Ends
 C - Chrome Ends
 WL - Walnut Ends
 O - Oak Ends
 B - Brass Ends

(B) Options

Blank - None
 10RS - ≤10% THD, Rapid Start
 P - Program Start
 20 - ≤20% THD

DESIGN

The WV213 Series Vanity Wall Bracket is a decorative and versatile fixture. It is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
 EB5 (500 LUMEN)
 EB7 (700 LUMEN)
 EB14 (1400 LUMEN)
 EB30 (3000 LUMEN)



CONVENIENCE OUTLET
 CO



PULL CHAIN
 PC
 3-STEP PULL CHAIN
 PC3



CONVENIENCE OUTLET
 WITH GFCI
 CO2




ROCKER SWITCH
 RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Clear prismatic or smooth white acrylic diffuser. Wall or ceiling mounted. White, chrome, walnut, oak, or brass ends available. Can be ordered with internal louver for directional lighting ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV216 SERIES

Vanity Wall Bracket

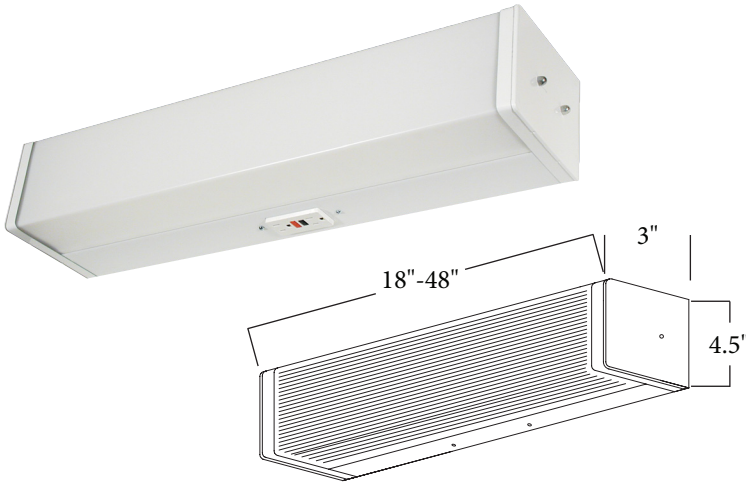

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV21611518SWD (A) (B)
1L 24" 17W T8 120/277V	WV21611724SWD (A) (B)
1L 48" 28W T8 120/277V	WV216128T848SWD (A) (B)
1L 48" 32W T8 120/277V	WV21613248SWD (A) (B)
2L 18" 15W T8 120/277V	WV21621518SWD (A) (B)
2L 24" 17W T8 120/277V	WV21621724SWD (A) (B)
2L 48" 28W T8 120/277V	WV216228T848SWD (A) (B)
2L 48" 32W T8 120/277V	WV21623248SWD (A) (B)

Option Codes

(A) End Caps

W - White Ends
 C - Chrome Ends
 WL - Walnut Ends
 O - Oak Ends
 B - Brass Ends

(B) Options


Blank - None
 10RS - ≤10% THD, Rapid Start
 P - Program Start
 20 - ≤20% THD

DESIGN


The WV216 Series Vanity Wall Bracket is a decorative and versatile fixture. It is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item

 T8 EMERGENCY BALLAST
 EB5 (500 LUMEN)
 EB7 (700 LUMEN)
 EB14 (1400 LUMEN)
 EB30 (3000 LUMEN)

 CONVENIENCE OUTLET
 CO

 PULL CHAIN
 PC
 3-STEP PULL CHAIN
 PC3

 CONVENIENCE OUTLET
 WITH GFCI
 CO2

 ROCKER SWITCH
 RS


 NIGHT LIGHT
 NL

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Clear prismatic diffuser. Wall or ceiling mounted. White, chrome, walnut, oak, or brass ends. Can be ordered with internal louver for directional lighting. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV335 SERIES

Vanity Wall Bracket

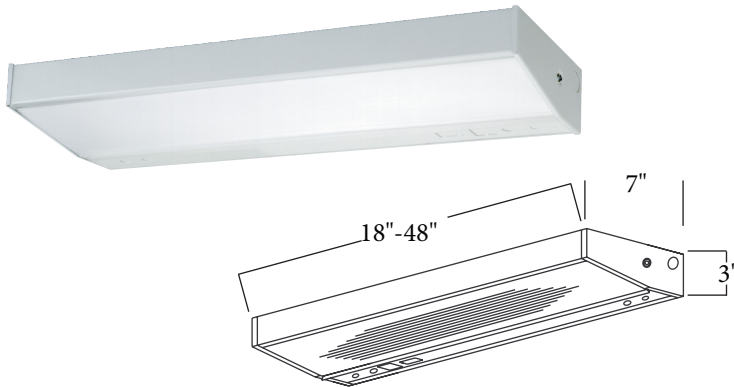

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV33511518SWD (A)
1L 24" 17W T8 120/277V	WV33511724SWD (A)
1L 36" 25W T8 120/277V	WV33512536SWD (A)
1L 48" 28W T8 120/277V	WV335128T848SWD (A)
1L 48" 32W T8 120/277V	WV33513248SWD (A)
2L 18" 15W T8 120/277V	WV33521518SWD (A)
2L 24" 17W T8 120/277V	WV33521724SWD (A)
2L 36" 25W T8 120/277V	WV33522536SWD (A)
2L 48" 28W T8 120/277V	WV335228T848SWD (A)
2L 48" 32W T8 120/277V	WV33523248SWD (A)

Option Codes

(A) Options

- Blank - None
- 10RS - ≤10% THD, Rapid Start
- P - Program Start
- 20 - ≤20% THD

DESIGN

The WV335 Series Vanity Wall Bracket is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC



CONVENIENCE OUTLET
WITH GFCI
CO2




ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Smooth white acrylic diffuser. Wall or ceiling mounted. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV337 SERIES

Vanity Wall Bracket

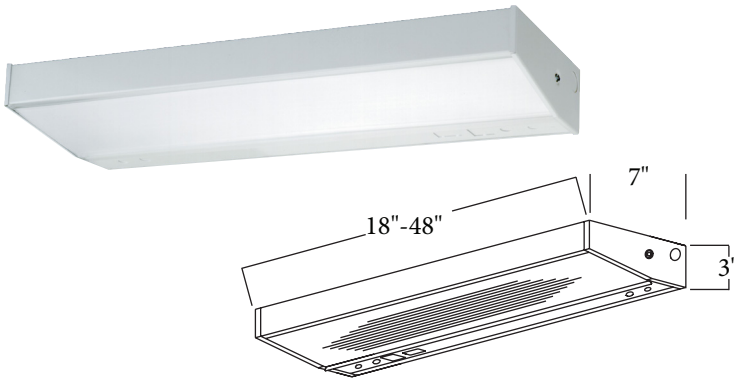

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV33711518SWD(A)
1L 24" 17W T8 120/277V	WV33711724SWD(A)
1L 36" 25W T8 120/277V	WV33712536SWD(A)
1L 48" 28W T8 120/277V	WV337128T848SWD(A)
1L 48" 32W T8 120/277V	WV33713248SWD(A)
2L 18" 15W T8 120/277V	WV33721518SWD(A)
2L 24" 17W T8 120/277V	WV33721724SWD(A)
2L 36" 25W T8 120/277V	WV33722536SWD(A)
2L 48" 28W T8 120/277V	WV337228T848SWD(A)
2L 48" 32W T8 120/277V	WV33723248SWD(A)

Option Codes

(A) Options

- Blank - None
- 10RS - $\leq 10\%$ THD, Rapid Start
- P - Program Start
- 20 - $\leq 20\%$ THD

DESIGN

The WV337 Series Vanity Wall Bracket is designed as a vandal resistant fixture. It is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, and task lighting.

ACCESSORIES

Order as separate line item

T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO

PULL CHAIN
PC



CONVENIENCE OUTLET
WITH GFCI
CO2


ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Smooth white acrylic diffuser. Wall or ceiling mounted. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV760 SERIES

Vanity Wall Bracket

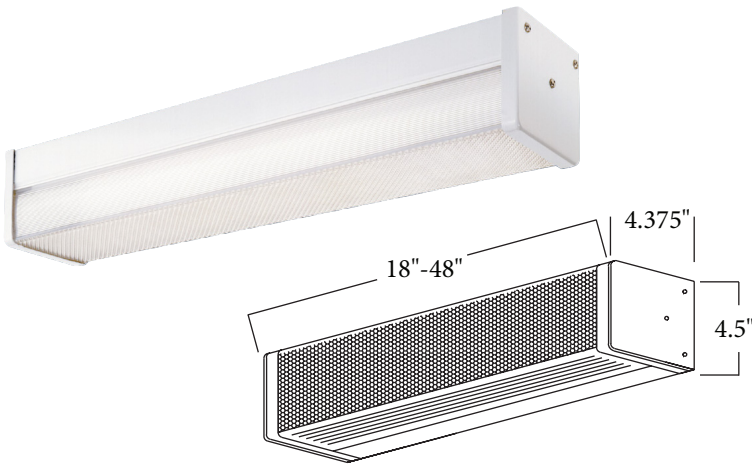

ORDERING INFORMATION

Description	Part Number
1L 18" 15W T8 120/277V	WV76011518D(A)(B)
1L 24" 17W T8 120/277V	WV76011724D(A)(B)
1L 48" 28W T8 120/277V	WV760128T848D(A)(B)
1L 48" 32W T8 120/277V	WV76013248D(A)(B)
2L 18" 15W T8 120/277V	WV76021518D(A)(B)
2L 24" 17W T8 120/277V	WV76021724D(A)(B)
2L 48" 28W T8 120/277V	WV760228T848D(A)(B)
2L 48" 32W T8 120/277V	WV76023248D(A)(B)

Option Codes

(A) Options

- Blank - None
- 10RS - ≤10% THD, Rapid Start
- P - Program Start
- 20 - ≤20% THD

DESIGN

The WV760 Series Vanity Wall Bracket is a decorative and versatile fixture. It is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC



CONVENIENCE OUTLET
WITH GFCI
CO2




ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Comes standard with a .125" clear polycarbonate lens that is impact and tamper resistant. Wall or ceiling mounted. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV1500 SERIES

Vanity Wall Bracket

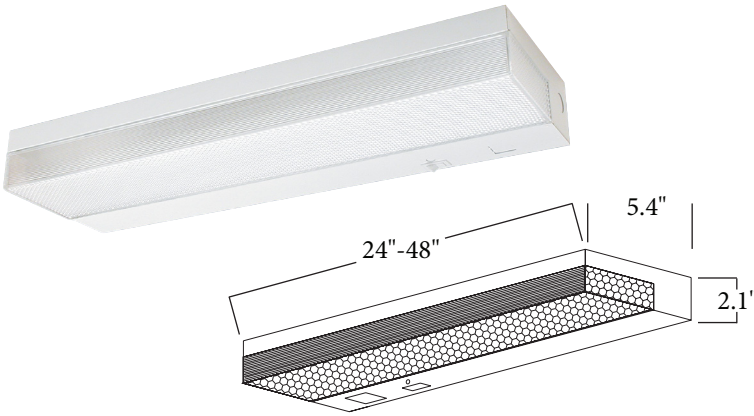

ORDERING INFORMATION

Description	Part Number
2L 24" 17W T8 120/277V	WV150021725 (A)D(B)
2L 36" 25W T8 120/277V	WV150022537 (A)D(B)
2L 48" 28W T8 120/277V	WV1500228T849 (A)D(B)
2L 48" 32W T8 120/277V	WV150023249 (A)D(B)
3L 24" 17W T8 120/277V	WV150031725 (A)D(B)
3L 36" 25W T8 120/277V	WV150032537 (A)D(B)
3L 48" 28W T8 120/277V	WV1500328T849 (A)D(B)
3L 48" 32W T8 120/277V	WV150033249 (A)D(B)

Option Codes

(A) Finish

W - White
B - Black

(B) Options


Blank - None
10RS - ≤10% THD, Rapid Start
P - Program Start
20 - ≤20% THD

DESIGN

The WV1500 Series Vanity Wall Bracket a decorative and versatile fixture. It is great for illuminating corridors, stairwells, lavatories, dressing rooms, utility areas, patient rooms, and task lighting.

ACCESSORIES

Order as separate line item



T8 EMERGENCY BALLAST
EB5 (500 LUMEN)
EB7 (700 LUMEN)
EB14 (1400 LUMEN)
EB30 (3000 LUMEN)



CONVENIENCE OUTLET
CO



PULL CHAIN
PC
3-STEP PULL CHAIN
PC3



CONVENIENCE OUTLET
WITH GFCI
CO2



ROCKER SWITCH
RS

TECHNICAL INFORMATION

Fixture features a structurally embossed, heavy gauge, cold rolled steel housing. Clear prismatic diffuser. Wall mounted. White or black finish. Comes standard with up light. ETL listed. Suitable for damp locations. Ballasts are solid state electronic. All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.