



Catalog Number	
Project	Type

Features & Specifications

Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms also for utility/area and task lighting.

Features

Optimized for T8 or T5 lamp performance. To direct illumination up or down, fixture is equipped with a matching metal front.

Construction

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with smooth white lens.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall. Discrete voltage must be specified for emergency pack options when wired with flex.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.




WV203 SERIES WALL / VANITY 203



DIMENSIONS

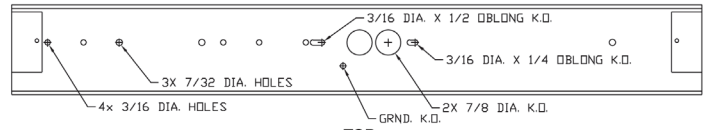

TOP
W/O DIFFUSER



Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wall Vanity 203, 1 Lamp, F32T8, 48", White finish, Multi-Volt = WV20313248SWDW)

--	--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	DIFFUSER	VOLTAGE	FINISH	BALLAST FACTOR	OPTIONS
WV203	1	15 - 15 watt T8 (18")	18 - 18"	SW-Smooth White	D - Multi-Volt	W - White C - Chrome	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start
	2	17 - 17 watt T8 (24")	24 - 24"		1 - 120V			P - Program Start
		25 - 25 watt T8 (36")	36 - 36"		2 - 277V			Z0 - ≤20% THD
		32 - 32 watt T8 (48")	48 - 48"		3 - 347V			EB5 - 500 Lumen Emergency Ballast
		28T8 - 28 watt T8 (48")			4 - 480V			EB7 - 700 Lumen Emergency Ballast
		*CFL - SPECIAL ORDER			*Multi-Volt is 120/277V			EB14 - 1400 Lumen Emergency Ballast
								EB30 - 3000 Lumen Emergency Ballast
								FBF - Fast-Blow Fuse
								SBF - Slow-Blow Fuse
								PC - Pull Chain
								PC3 - 3 Step Pull Chain
								RS - Rocker Switch
								CO - Convenience Outlet
								CO2 - GFCI Convenience Outlet